



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cascade

PD-41814L

PRODUCT DESCRIPTION

Like a chic yet understated exclamation of luxury, these pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.

FEATURES


- Driver concealed within the canopy
- CNC precision-cut etched diffuser
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV
Color Temp	3500K
CRI	90
Construction	Steel body with acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-41819 - Glass

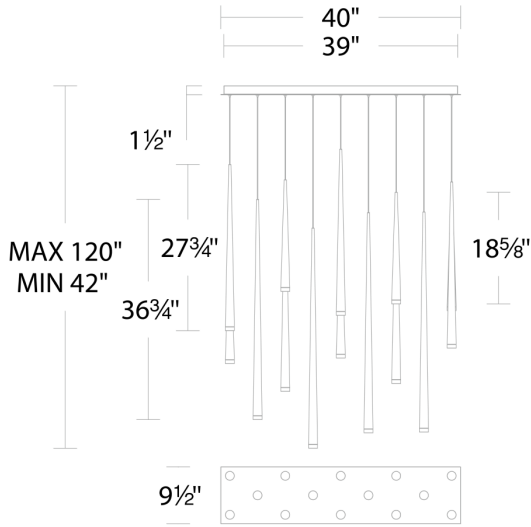

PD-41814L

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-41814L 40" - 14 Lights	3500K 90	98W	5254	AB Aged Brass
	3500K 90	98W	5254	BK Black
	3500K 90	98W	5254	PN Polished Nickel

Example: **PD-41814L-PN**

For custom requests please contact customs@modernforms.com



Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Cascade

PD-41823L

PRODUCT DESCRIPTION


A new aged brass finish updates the original Cascade design for a more refined take on minimalist glam. Each pendant illuminates bountifully while the etched caps punctuate each piecelike a chic yet understated exclamation of luxury.

FEATURES

- Driver concealed within the canopy
- CNC precision-cut etched diffuser
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 23 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV
Color Temp	3500K
CRI	90
Construction	Steel body with acrylic diffuser

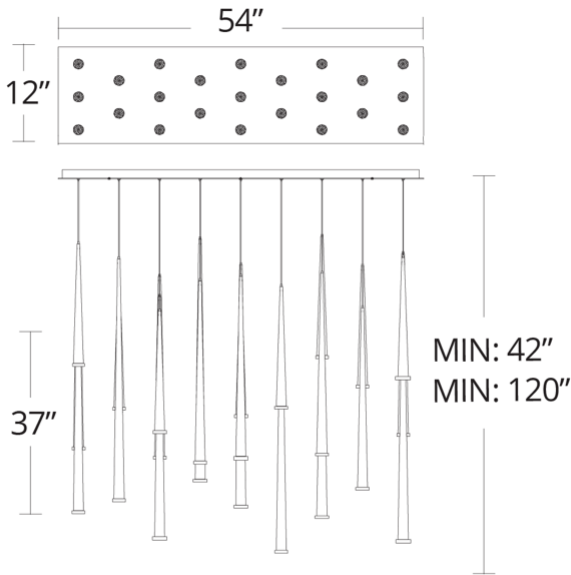

PD-41823L

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-41823L 54" - 23 Lights	3500K 90	161W	8631	AB Aged Brass
	3500K 90	161W	8631	BK Black
	3500K 90	161W	8631	PN Polished Nickel

Example: **PD-41823L-PN**

For custom requests please contact customs@modernforms.com